






UNC Workgroup Report		At what stage is this document in the process?
<h1>UNC 0607S:</h1> <h2>Amendment to Gas Quality NTS Entry Specification at the St Fergus NSMP System Entry Point</h2>		<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="border: 1px solid #ccc; padding: 2px; display: flex; align-items: center; gap: 5px;">01 Modification</div> <div style="border: 1px solid #ccc; padding: 2px; display: flex; align-items: center; gap: 5px;">02 Workgroup Report</div> <div style="border: 1px solid #ccc; padding: 2px; display: flex; align-items: center; gap: 5px;">03 Draft Modification Report</div> <div style="border: 1px solid #ccc; padding: 2px; display: flex; align-items: center; gap: 5px;">04 Final Modification Report</div> </div>
<p>Purpose of Modification:</p> <p>This enabling modification will facilitate a change to the current contractual Carbon Dioxide limit at the St Fergus NSMP System Entry Point, through modification of a Network Entry Provision contained within the Network Entry Agreement (NEA) between National Grid Gas plc and North Sea Midstream Partners Limited (NSMP) in respect of the St Fergus NSMP Sub Terminal.</p>		
	<p>The Workgroup recommends that this modification should: <i>(delete as appropriate)</i></p> <ul style="list-style-type: none"> • be subject to self-governance procedures • be [further] assessed by a Workgroup • proceed to Consultation <p>The Panel will consider this Workgroup Report on [15 June 2017]. The Panel will consider the recommendations and determine the appropriate next steps.</p>	
	High Impact: None	
	Medium Impact: None	
	Low Impact: Transporters, Shippers and Consumers	

Formatted: Strikethrough

Contents	
1 Summary	3
2 Governance	3
3 Why Change?	4
4 Code Specific Matters	6
5 Solution	6
6 Impacts & Other Considerations	6
7 Relevant Objectives	20
8 Implementation	21
9 Legal Text	21
10 Recommendations	21

Timetable	
Modification timetable:	
Initial consideration by Workgroup	05 January 2017
Amended Modification considered by Workgroup	dd month year
Workgroup Report presented to Panel	15 June 2017
Draft Modification Report issued for consultation	15 June 2017
Consultation Close-out for representations	dd month year
Final Modification Report available for Panel	dd month year
Modification Panel decision	dd month year

 Any questions?

Contact:
Joint Office of Gas Transporters



enquiries@gasgovernance.co.uk



0121 288 2107

Proposer:
Murray Kirkpatrick



murray.kirkpatrick@bp.com



+44 1224942522

Transporter:
National Grid NTS



Deborah.brace@nationalgrid.com



01926 653233

Deleted: 29

Deleted: 30

Deleted: 30

Deleted: 30

1 Summary

What

This is an enabling modification that seeks to facilitate an increase in the carbon dioxide limit with the Network Entry Agreement (NEA) at the North Sea Midstream Partners (NSMP) sub-terminal at St. Fergus between National Grid Gas plc and NSMP Ltd. It is proposed to increase the limit from 4mol% to 5.5mol%.

Why

The Rhum gas field can be up to 6.5mol% CO₂, the effects of which are mitigated via blending with low CO₂ gas from Norway to St Fergus via the Vesterled Pipeline. This is not sustainable due to the prohibitive cost of procuring this service from Norwegian shippers, potentially leading to the early cessation of production from Rhum and Bruce fields.

The alternative processing and treatment solutions to remove the excess carbon dioxide have been considered upstream of the NTS (both offshore and onshore at the NSMP sub-terminal), however these would require significant investment and time to implement. Rhum would become cash negative and cease production before any project became operational.

How

In accordance with the UNC Transportation Principal Document Section I 2.2.3 (a), the Proposer is seeking to amend the NEA described above via this enabling modification. On satisfactory completion of the UNC process the parties to the NEA will be able to seek Authority consent to amend the agreement.

2 Governance

Justification for Self-Governance

Self-Governance is proposed because the higher CO₂ gas is unlikely to have a material effect on the following self-governance criteria:

- (aa) *existing or future gas consumers*. The dilution from low CO₂ (<2mol%) gas from the SEGAL sub-terminal and SAGE sub-terminal (<4mol%) and low CO₂ gas from Norway via Vesterled means that the gas export into the NTS will remain below 4mol% under most operating scenarios; and
- (bb) *competition in the shipping, transportation or supply of gas conveyed through pipes or any commercial activities connected with the shipping, transportation or supply of gas conveyed through pipes*. By ensuring continued supplies of UK gas into the system security of supply will be enhanced, competition will be maintained and flow of gas into the NTS will be enhanced; and
- (cc) *the operation of one or more pipe-line system*. Continued flow of Bruce and Rhum gas (up to 5% of UK domestic gas supply) will maintain flow rates in the NTS and extend system life ensuring security of supply and the opportunity to develop additional flows into the system in the future; and
- (dd) *matters relating to sustainable development, safety or security of supply, or the management of market or network emergencies*. The modification will enhance security of supply by ensuring that fields do not prematurely cease production and more indigenous gas will flow into the market, giving greater coverage for market or network emergencies.

The preliminary views indicate there will be no impact on existing or future gas consumers as the dilution from low CO₂ from the SEGAL and SAGE sub-terminals and low CO₂ gas from Norway via Vesterled means that the gas exported into the NTS will remain below 4mol% under most operating scenarios. Indeed, security of supply will be enhanced and recovery of oil and gas from the UK Continental Shelf (UKCS) will be maximised. The Panel's engagement is sought to assess the impact of the requested change, in order to confirm that a higher CO₂ limit at St Fergus NSMP sub-terminal would be beneficial for the GB gas market.

Requested Next Steps

This modification should:

- be subject to self-governance
- proceed to Consultation

The workgroup has considered the modification proposal at length and has concluded...

Deleted: (delete as appropriate)

Deleted: <#>be assessed by a Workgroup -

Deleted: Rationale for requested next steps inserted here

3 Why Change?

With the increasing maturity of UKCS as a gas production area, all producers are being asked by the Oil and Gas Authority (OGA) to focus on maximising economic recovery (MER) from existing fields.

The current CO₂ limit at the St Fergus NSMP sub-terminal is 4.0mol%. The commingled stream that arrives at the terminal via the Frigg UK Association (FUKA) pipeline system is derived from a number of Northern North Sea and West of Shetland fields including the BP operated Rhum field. The CO₂ content of the Rhum gas is between 6.2% - 6.5mol% and the Rhum field currently relies on blending with other fields in order to meet Gas Entry Conditions. As this gas is blended with other Shippers' gas within the FUKA pipeline (including the low CO₂ gas from the Laggan/Tormore fields), by the time it enters the NTS the CO₂ content is below 4.0mol%.

On occasions when the Laggan/Tormore fields trip and temporarily cease to export low CO₂ gas into the FUKA pipeline, high CO₂ content gas from the Rhum field can remain in the pipeline. Restarting gas export from the Laggan/Tormore fields then leads to a short duration increase in the CO₂ content of gas arriving at the St Fergus NSMP sub-terminal above 4.0mol% as the increasing pipeline pressure from the Laggan/Tormore restart pushes the high CO₂ Rhum gas along the pipeline and into the sub-terminal. In order to mitigate this intermittent risk of exceeding the 4.0mol% when Laggan Tormore restarts, a guaranteed daily flow of additional low CO₂ blend gas is procured from Norway to the St Fergus NSMP sub-terminal via a commercial arrangement. This gas is transported daily to the St Fergus NSMP sub-terminal via the Norwegian Vesterled pipeline. The commercial mechanism with the Norwegian shippers is costly and Rhum cannot endure having to continually purchase blend gas to cover the brief periods when additional blending gas may be required. The two other sub-terminals which are adjacent to the NSMP sub-terminal contribute blending gas which reduces the combined CO₂ content of the export gas before the gas reaches consumers.

Rhum has been delivering natural gas into the NTS as part of a commingled stream since 2005. St Fergus NSMP sub-terminal delivery to the NTS has not exceeded 4.0mol%. Rhum production flows of c.4.5 mcmd is, on average, about 15% of the total flow through FUKA and Rhum and Bruce combined account for approximately 5% of the UK National Supply.

Historically Rhum was able to export gas into the FUKA system above 3.8mol% CO₂ without increasing the CO₂ content of sub-terminal NTS delivery gas above 4.0mol% by blending the gas with low CO₂ gas from the Bruce/Keith fields (now almost depleted) and from the Alwyn area field (rates now much lower

and not far from 4.0mol% CO₂ content. The suspension of Rhum production in 2010 to comply with EU sanctions against Iran (Rhum is jointly owned by the Iranian Oil Company) has created a disparity in the relative remaining gas volumes and production rates of Rhum gas relative to the Bruce/Keith and Alwyn fields resulting in the requirement for additional firm delivery to the NSMP sub-terminal of low CO₂ volumes of Norwegian blend gas.

The import of firm volumes of low CO₂ Norwegian gas commenced in 2015; this is imported via the Vesterled pipeline (from Heimdal in the Norwegian sector to the NSMP terminal) to offset the decline in blending sources within the FUKA pipeline and ensure the CO₂ content in the export gas from the sub-terminal into the NTS remained below 4.0mol%. This activity was viewed as a short term measure until the Laggan/Tormore fields and the associated Shetland Gas Plant started up (February 2016). While Laggan/Tormore gas provides low CO₂ gas directly into the FUKA system, modelling of pipeline flow behaviour and the subsequent observation of actual pipeline flows, has led to a requirement for an increase in the volume of firm Norwegian gas which has to be delivered on a daily basis. This is because when there is an unplanned trip/outage of the Laggan/Tormore fields, gas from the Rhum field that is already in the FUKA pipeline causes an increase in the CO₂ content of FUKA pipeline gas. On restart and ramp-up of Laggan/Tormore production, the "slug" of high CO₂ content gas already in the FUKA pipeline is accelerated into the St Fergus terminal causing a pulse of higher CO₂ gas which requires the firm delivery of Norwegian gas to blend down to <4.0mol% prior to entry into the NTS.

Once delivered into the FUKA system, the Rhum gas delivery rate at the terminal is largely determined by the flow rates into the FUKA system from the Alwyn area (up to 6 mcm/d) and from the Laggan/Tormore fields (currently up to 14 mcm/d) in addition to the Bruce and Rhum flow rates. Hence a slug of up to 10 mcm of Rhum composition gas (between 3.8-6.5mol% CO₂) could in principle arrive at the NSMP sub-terminal at rates of up to 20 mcm/d. As an unplanned outage of the Laggan/Tormore fields cannot be predicted, the St Fergus terminal operator has requested a constant volume of Norwegian gas at sufficient quantity to constantly cover the risk of a Laggan/Tormore restart generating a pulse of higher CO₂ gas causing a breach of the CO₂ specification in the NEA (4 mol%). A constant flow of Norwegian gas is required to guarantee meeting the NEA specification limit of 4.0mol% CO₂ as it would take too long for a reactive increase in Norwegian gas flow to reach the terminal. The cost of continuous provision of this gas at the flow rates required to cover Laggan Tormore field re-starts is prohibitive.

The provision of processing and treatment solutions to remove the excess CO₂ upstream of the NTS (both offshore and onshore at the NSMP sub-terminal) have been considered however, these would require significant investment and substantial time (3+ years) to implement. The Rhum field will become sub-economic and cease production before such a project ~~could become~~ operational. While the planned life of the Rhum field is until at least 2023, longevity is limited by the economic life of the host platform at the Bruce field. There is insufficient production from the Bruce field to cover the operating costs for the Bruce platform which is reliant on a throughput related cost share arrangement with the Rhum field to cover such costs. If Rhum field cannot flow at sufficiently high rates (either due to the cost of providing Norwegian blend gas or due to curtailment to meet current CO₂ specifications) there will be insufficient flow to cover Bruce platform costs and the Bruce, Rhum and Keith fields will cease production.

To assess the feasibility of gas with a higher CO₂ content exiting the NSMP sub-terminal, BP has engaged with National Grid NTS to understand whether a higher limit would be compatible with network safety and operational efficiency. The preliminary results of National Grid NTS and BP work have so far identified no material increase in risks associated with 5.5mol% CO₂ content. In addition, as gas at other St Fergus System Entry Points has a CO₂ content significantly lower than 4.0mol%, modelling demonstrates that gas with higher CO₂ content at the NSMP System Entry Point could be blended with gas from the adjacent sub-terminals without impacting the system or consumers. It should also be noted that CO₂ is not a defined parameter in the Gas Safety (Management) Regulations 1996, and no

Deleted: became

Deleted: ,

amendment of GS(M)R is required. ~~Therefore, no immediate impact on consumers has been found thus far.~~

Deleted: Therefore

Comment [RH1]: Wording suggested at workgroup 24/4/17

Deleted: no consumers are impacted.

What the effects are, should the change not be made

The significant cost of securing additional firm blend gas from Norway will lead to the early Cessation of Production from the Rhum and associated Bruce and Keith fields. This problem could be addressed by treating the gas for removal of CO₂ at the wellhead or at the terminal, but the investment to bring the quality in line with current specification would be significant, take many years to complete and would make these fields uneconomic.

This modification seeks to establish a change to the existing NEA parameters as a more efficient and economic approach to facilitate delivery of potential new supplies to the System, subject to ensuring no adverse impact on consumers or on the operation of the pipeline system. Therefore, in light of the preliminary views achieved so far, the Panel's engagement is sought to assess the impact of the requested change, in order to confirm that a higher CO₂ limit at St Fergus NSMP sub-terminal would be beneficial for the GB gas market.

If the change is not made then the resulting impacts will most likely be:

- Early abandonment of Rhum, Bruce and Keith, loss of 600 jobs and U.K. tax revenues.
- Stranded reserves (~50% reserves) that would otherwise be economic to produce.

4 Code Specific Matters

Reference Documents

None.

Knowledge/Skills

No additional skills or knowledge are required to assess this modification.

5 Solution

This modification seeks to amend a Network Entry Provision within the existing St Fergus NSMP System NEA. This amendment would increase the CO₂ upper limit for gas delivered from the St Fergus NSMP Sub terminal System Entry Point into the National Transmission System to 5.5mol% from the current limit of 4.0mol%.

6 Impacts & Other Considerations

All parts of this section must be completed; showing "None" where the Workgroup believes this is so.

Does this modification impact a Significant Code Review (SCR) or other significant industry change projects, if so, how?

No impact identified.

Consumer Impacts

No impact/positive impact. Consumers can currently receive gas at 4mol% from both the SAGE and St Fergus NSMP sub-terminals. Occasional increases in CO₂ content of export gas from St Fergus NSMP sub-terminal are currently permitted by NTS as the adjacent terminals provide additional low CO₂ gas which commingles with the NSMP sub-terminal gas, to maintain NTS gas below 4mol%.

For Information; NSMP gas including Rhum is GS(M)R compliant with or without Laggan Tormore flows from the Shetland Gas Plant. Rhum gas on its own is GS(M)R compliant.

If Rhum gas flows at normal export rates and is commingled with all FUKA sources excluding Laggan/Tormore, the composition of the combined export gas is ~4.5mol% CO₂. With Laggan/Tormore fields flowing and Rhum at peak rates, the CO₂ content of the commingled gas in the FUKA pipeline is <2.7mol%.

Implementing the change will remove the significant cost of securing additional firm blend gas from Norway and remove the probability of early Cessation of Production from the Rhum and associated Bruce and Keith fields. This will have a positive impact on the security of supply for the UK as a whole. Recovery of oil and gas from the specific fields will be maintained, while the continued flow of gas into the pipeline systems ensure a more efficient and economic operation of the pipeline system and the increased utilization of the existing infrastructure capacity will extend the useful life of existing assets and enable further new developments to access the pipeline infrastructure in the future.

Formatted: Highlight

Consumer Impact Assessment

(Workgroup assessment of proposer initial view or subsequent information)

Criteria	Extent of Impact
Which Consumer groups are affected?	<p><i>Please consider each group and delete if not applicable.</i></p> <ul style="list-style-type: none"> • Domestic Consumers • Small non-domestic Consumers • Large non-domestic Consumers • Very Large Consumers
What costs or benefits will pass through to them?	<p><i>Please explain what costs will ultimately flow through to each Consumer group. If no costs pass through to Consumers, please explain why. Use the General Market Assumptions approved by Panel to express as 'cost per consumer'.</i></p> <p>Insert text here</p>
When will these costs/benefits impact upon consumers?	<p><i>Unless this is 'immediately on implementation', please explain any deferred impact.</i></p> <p>Insert text here</p>
Are there any other Consumer Impacts?	<p><i>Prompts:</i></p> <p><i>Are there any impacts on switching?</i></p> <p><i>Is the provision of information affected?</i></p> <p><i>Are Product Classes affected?</i></p> <p>Insert text here</p>
General Market Assumptions as at December 2016 (to underpin the Costs analysis)	

Comment [RH2]: This section still to be completed at May workgroup meeting, see also actions to contact consumer representative organisations

<i>Number of Domestic consumers</i>	<i>21 million</i>
<i>Number of non-domestic consumers <73,200 kWh/annum</i>	<i>500,000</i>
<i>Number of consumers between 73,200 and 732,000 kWh/annum</i>	<i>250,000</i>
<i>Number of very large consumers >732,000 kWh/annum</i>	<i>26,000</i>

Cross Code Impacts

None identified.

EU Code Impacts

None identified.

Central Systems Impacts

None.

Workgroup Impact Assessment

The Workgroup identified a number of areas requiring closer assessment and collated them into a number of key themes, as follows:

- **Further Background to the Change**
- **Frequency of occurrence and the penetration into the NTS**
- **Anticipated Impact on Gas Quality**
- **National Grid NTS' Assessment of its Operational Risks**
- **Impact on Consumers**
- **Impact on Storage Operators**
- **Carbon Cost Assessment**
- **Wider Considerations**
- **Conclusions**


Further Background to the Change

Historic operational procedures & flows at the site

Historically Rhum was able to export gas into the FUKA system above 3.8mol% CO₂ without increasing the CO₂ content of sub-terminal NTS delivery gas above 4.0mol% through blending with low CO₂ gas from the Bruce/Keith fields (now almost depleted) and from the Alwyn area field (rates now much lower and not far from 4.0mol% CO₂ content). The suspension of Rhum production in 2010 to comply with EU sanctions against Iran (Rhum is jointly owned by the Iranian Oil Company) has created a disparity in the relative remaining gas volumes and production rates of Rhum gas relative to the Bruce/Keith and Alwyn fields. On the restart of Rhum production in 2014 this has resulted in the daily requirement for additional firm delivery to the NSMP sub-terminal of low CO₂ volumes of Norwegian blend gas.

Current operational procedures & flows at the site

A schematic illustrating the St Fergus sub-terminal entry to the NTS can be found below that shows the configuration of the various connections and how gas flows combine and feed into the NTS entry point.

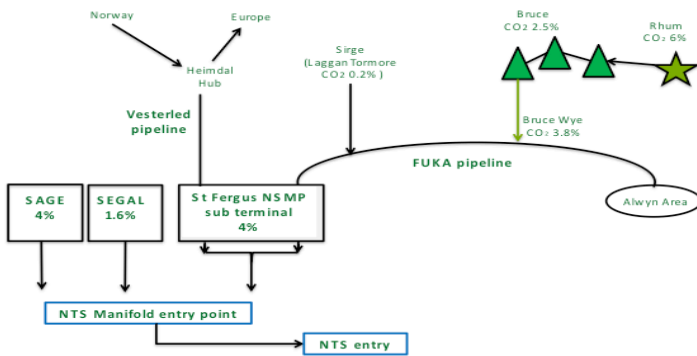

Problems arise when an unplanned trip occurs at Laggan Tormore and there is insufficient blend gas to manage the requirement to reduce the CO₂ limit to 2.5mol% before reaching the NTS entry point.

There are no CO₂ removal systems at the terminal so the Rhum owners currently manage the risk by purchasing Vesterled gas on a daily basis to ensure there is a sufficient supply of gas available for blending should Laggan Tormore experience an unplanned trip. If this safeguard were not in place then the whole FUKA system would have to be shut down.

As a subsea tie-back the Rhum field can only be produced when the Bruce platform is operational. As a consequence, although Rhum gas can be up to 6.5mol% CO₂ it benefits from blending with lower CO₂ Bruce gas. The requested NEA change to 5.5mol% takes into account this blending and is set at a level to accommodate any CO₂ spike in FUKA pipeline gas resulting from a start-up of Laggan Tormore fields after a production trip while ensuring that the gas export into the NTS remains below 4mol% under most operating scenarios. Setting the NEA limit to 5.5mol% rather than 6.5mol% will require that on occasion e.g. during planned field/terminal outages, the Rhum field will either ramp back or shut down production or source firm quantities of low CO₂ blend gas.

Frequency of occurrence and the penetration into the NTS

Number of occurrences where St Fergus NSMP Terminal CO₂ limit could have been over 4mol%

The 5.5% limit would only be needed operationally if an offshore trip at the low CO₂ Laggan Tormore field occurred. When Laggan Tormore restarts after such a trip it pushes a volume of high CO₂ gas from Rhum towards the terminal in a stream of other UKCS gas and thus causes a temporary CO₂ spike, which if the CO₂ is 4mol% would result in the shut in of all UKCS gas in the FUKA pipeline system and not just the Rhum flows.

Since the startup of twin compressor operation in May 2016, the FUKA operator has recorded **13** separate "total" outages of the Laggan/Tormore fields (see diagram below).

Double Compressor Trips at SGP since 2 Compressor Operations (May 16)			
	Date Start	Date End	Total Time (Days)
1	21/05/2016 03:00	21/05/2016 09:00	0.3
2	21/06/2016 20:50	24/06/2016 12:00	2.6
3	26/06/2016 03:00	26/06/2016 10:45	0.3
4	14/07/2016 16:30	15/07/2016 09:00	0.7
5	18/07/2016 18:10	18/07/2016 23:48	0.2
6	07/08/2016 05:32	08/08/2016 22:03	1.7
7	03/10/2016 00:00	04/10/2016 10:30	1.4
8	06/10/2016 13:18	07/10/2016 05:00	0.7
9	08/01/2017 00:51	08/01/2017 09:57	0.4
10	06/02/2017 03:09	06/02/2017 14:46	0.5
11	09/02/2017 11:17	09/02/2017 16:38	0.2
12	11/02/2017 15:04	12/02/2017 11:48	0.9
13	14/02/2017 15:37	15/02/2017 06:42	0.6


Total	10.5
Average (Days)	0.8

By their nature, unplanned outages cannot be forecast, however the historic uptime of facilities could be considered as an indicator of reliability. The Shetland Gas Plant (SGP), which processes fluids from the Laggan and Tormore fields, is essentially new. As highlighted, since May 2016 a total of 13 trips have been recorded (to end Feb 2017) giving an aggregate of 10 days outage overall. This equates to a 4% downtime. However, it is understood that SGP has now commissioned an additional compression capacity, which should help maintain and possibly further improve reliability. A contracted new field that is currently under development will also provide additional gas into the FUKA pipeline. It is expected that the reliability will be high from new equipment once the initial commissioning and "fine tuning" have been completed. The reliability of another older infrastructure providing gas into the pipeline (existing FUKA entrant) has been higher at over 98% over the last 1 – 2 years.

As mentioned earlier, Laggan Tormore gas had been unavailable only 4% of the time. The cost of purchasing this contingency blend gas to cover these unplanned outages is prohibitive to Rhum and no longer sustainable. If another contingency mechanism cannot be found then it will lead to the early closure of both the Rhum and the Bruce fields.

St Fergus Sub Terminal System Entry Volumes (May 2012 to May 2016)

A blend gas graph illustrating St Fergus sub-terminals system entry volumes from May 2012 - May 2016 can be found below.

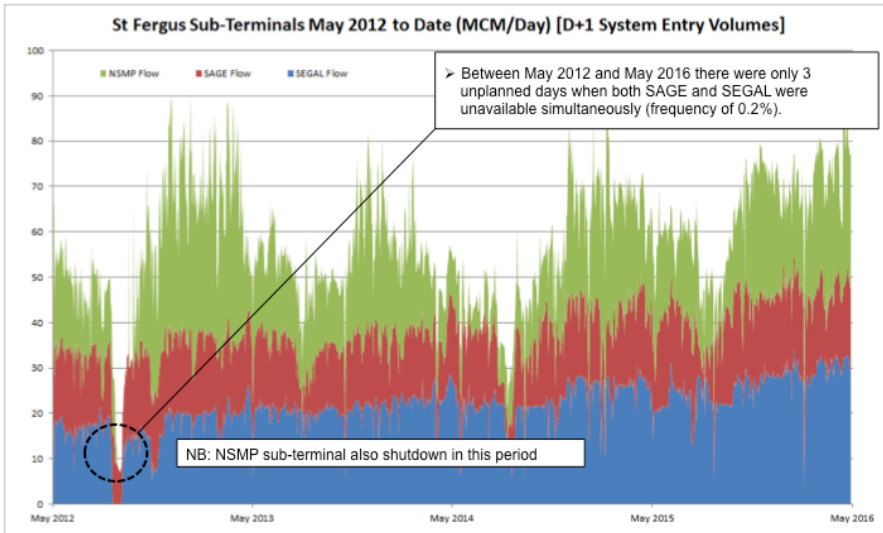

7

It should be noted that there were only 3 unplanned days when both SAGE and SEGAL were unavailable simultaneously (a frequency of 0.2%). In these circumstances, SAGE and SEGAL do not mitigate the risk of there being CO₂ over 4mol% and the fields would need to be shutdown.

St Fergus CO₂ Blending Analysis

An example of operational flows at the St Fergus NSMP terminal can be found in Appendix 1. SAGE and SEGAL have separate entry points into the NTS and are downstream of the compression station; the blending happens within the NTS terminal. Frigg gas blends with Vesterled and then further with SAGE and SEGAL before entering the NTS terminal.

Four different scenarios were analysed (see Appendix [2]?) and all four assume Laggan Tormore trips for over 60 hours (highest of historical trips observed) on an ordinary summer's day. Actual average flow rates from SAGE and SEGAL are used but NSMP flows are adjusted in each scenario. The scenarios suggest that the gas flowing into the NTS does not go above 4mol% even when Laggan Tormore goes offline unplanned.

Comment [C3]: Do we want to include further information on the 4 scenarios in an appendix?

A high CO₂ slug is produced but it is dependent on the actual flow rates when Laggan Tormore restarts. The actual size and duration is subject to the speed of the ramp rate. If this rate is slow, there is less pressure in the pipeline, the CO₂ content is lower, but the duration is longer. The BP scenarios assume Laggan Tormore ramps up to full production over a 6 hour period. This longer ramp up of Laggan Tormore reduces the rate at which offspec gas arrives at the NSMP terminal, thereby reducing peak CO₂ levels.

For the BP Scenarios, the peak CO₂ slug duration ranges from 10 hours (scenario 1, peak CO₂ 3.65%) to 15 hours (scenario 4, peak CO₂ 3.87%). Therefore, the duration of 15 hours is considered the worst-case scenario.

The Workgroup asked National Grid NTS to provide a view on the analysis performed by BP and they used the inputs to the four BP scenarios and calculated the CO₂ content that would be expected on

the pipelines leaving St Fergus terminal. The results below demonstrate that National Grid NTS' calculations align well with the analysis performed by BP. (Note the figure of 172 mscm/d relates to total national demand)

30th June 2016 (172mscm/d)							
Scenario 1		Scenario 2		Scenario 3		Scenario 4	
BP Results	NG Results	BP Results	NG Results	BP Results	NG Results	BP Results	NG Results
3.65	3.65	3.78	3.79	3.66	3.66	3.87	3.88



Penetration into the NTS

In respect of the BP scenarios National Grid NTS were also asked to provide a 'heat map' analysis; to determine the risk of high CO₂ gas entering the NTS and how far any out of specification flow might then be expected to reach. The Workgroup also requested that the analysis contained information about the assumed distribution of supplies, where the gas would blend on the NTS and the NTS flow patterns.

Two 'heat map' schematics were provided by NTS. The first shows the penetration of aggregate flows of St Fergus gas into the NTS, assuming entry flows are equal to those presented in BP's analysis, scenario 1 (selected because this contains the highest flows of all BP scenarios and is thus a 'worst case' from the BP scenarios):

- SAGE: 20 mcmd
- SEGAL: 18.3 mcmd
- Vesterled: 8.2 mcmd
- Frigg: 30 mcmd


Supplies from other NTS entry points are proportionate to the 2016 Future Energy Scenarios (FES) for that demand level. The percentages show the contribution to total demand from each supply source.

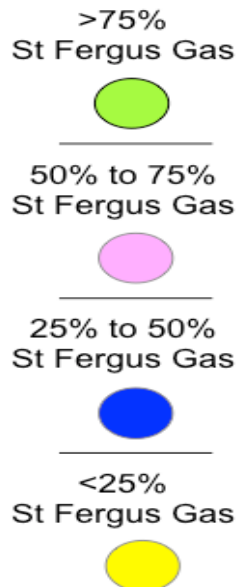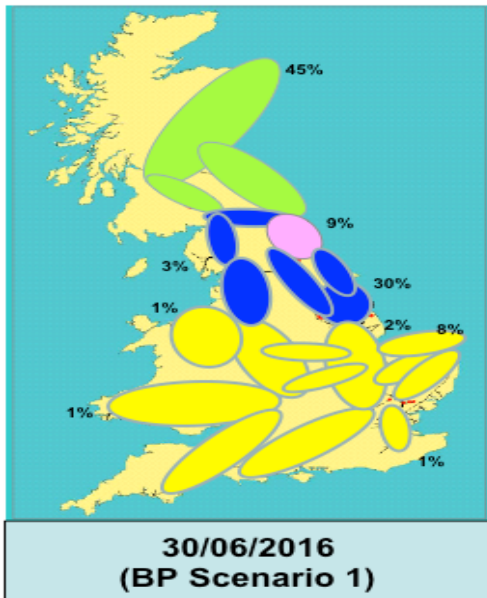

Comment [C4]: To be updated to include the weighted average CO₂ positions and the maximum daily CO₂ levels.

The second 'heat map' schematic shows the levels of CO₂ on the NTS, assuming St Fergus sub-terminal flows and CO₂ content are equal to BP's scenario 4 (giving a 'worst case' CO₂ entering the NTS from the four BP scenarios). This scenario shows a blend of 3.87% CO₂ entering the NTS, therefore no NTS direct connect receives any gas in excess of 4%.

Supplies from other NTS entry points are proportionate to the 2016 FES for that demand level and deliver gas at their CO₂ limits. The percentages show the contribution to total demand from each supply source.

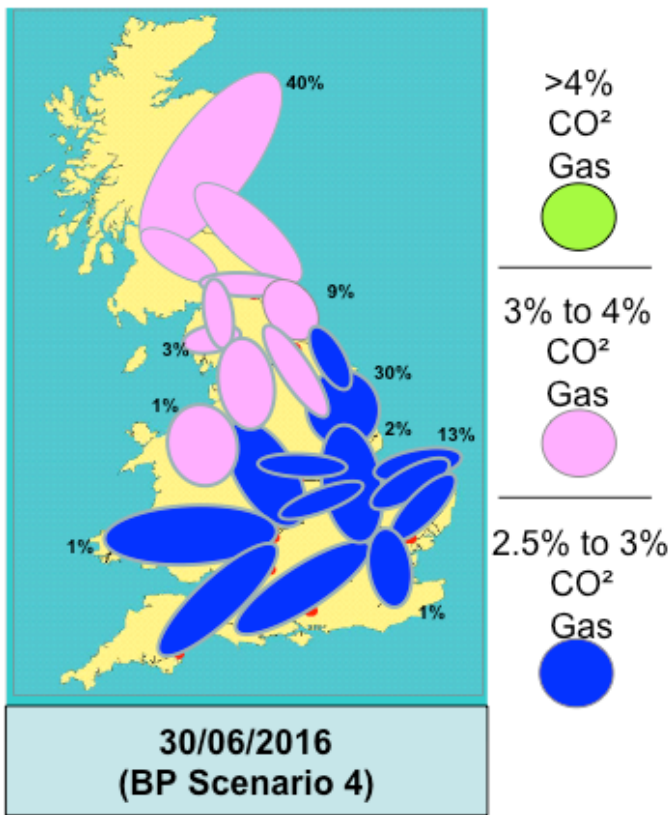

In order to understand the impact on the St Fergus blending, the Workgroup also asked National Grid NTS to provide another 'worst case' scenario based on the Shell low flow period in June 2016 (using actual CO₂ data and NEA upper limits). To calculate the CO₂ blend at St Fergus terminal under each of BP's 4 scenarios, National Grid NTS altered:

- the Shell flow from 18.3 mscm/d to 10.4 mscm/d
- Shell CO₂ content from 1.6% to the maximum CO₂ limit of 2.0%

The results below show an increase above 4% CO₂ content entering the NTS under two of the scenarios.

30th June 2016 (172mscm/d National Demand)					
Scenario 1			Scenario 2		
BP Results	NG Previous Result	NG New Result	BP Results	NG Previous Result	NG New Result
3.65	3.65	3.94	3.78	3.79	4.13

30th June 2016 (172mscm/d National Demand)					
Scenario 3			Scenario 4		
BP Results	NG Previous Result	NG New Result	BP Results	NG Previous Result	NG New Result
3.66	3.66	4	3.87	3.88	4.24

Members of the Workgroup felt that this extreme scenario is unlikely to occur as the low flow from the Shell terminal was caused by a planned outage and the following steps would have been taken in advance to mitigate CO₂ >4% entering the NTS:

- Rhum owners would procure sufficient firm quantities of low CO₂ gas via the Norwegian Vesterled pipeline;
- or
- Rhum owners would cut back or shut in production to limit the volumes of high CO₂ gas

It should also be noted that the BP scenarios, on which this extreme scenario is based, already assume that a number of unlikely events would occur concurrently, namely:

- Conservative assumption in BP scenarios that there would be no low CO₂ blend gas flow via the Norwegian Vesterled pipeline. Vesterled < 3.7% CO₂ with average summer flow rates of 10.4 mcm in 2016.
- Conservative assumption of concurrent outages of all the fields delivering gas into the FUKA pipeline system e.g. BP scenario 4 assumes FUKA is operating at around 20% of normal throughput rates.

It should be further noted that a new Norwegian field is due to start-up shortly which will bring additional volumes of low CO₂ blend gas into the FUKA pipeline system which will further help mitigate any Laggan Tormore unplanned trip scenarios.

Insert text here for: **Action 0307: SB to look at the low flow period (8 days in June 2016) to clarify the background to the event and how relevant it is to this analysis/development of further scenarios. Carried Forward**

CO₂ content at Norwegian gas fields

The Workgroup asked if changing the CO₂ limit to 5.5% would introduce a risk of higher CO₂ gas entering through the Vesterled pipeline in the future. Information received from Gassco indicated that:

- The historical range in CO₂ levels had been 1.5% - 3.5%
- Production volumes are forecast to fall rapidly over the next few years
- Forecast CO₂ levels are expected to be 1.5% - 4%.

Anticipated Impact on Gas Quality

Action 0106: BP (MK) to clarify if other gas quality parameters are affected (CV, Wobbe and Dewpoint).-- awaiting Dewpoint issue to be clarified. DOD to also confirm if there are any known issues with regards to introducing water through the application of this process at higher CO₂ level.

Comment [RH5]: Water or hydrocarbon

The Workgroup sought input from NSMP to improve their understanding of how the plant operates at the right Wobbe Index level and the effect on the CO₂ levels/liquids.


NSMP Response

The composition of export gas from St Fergus is monitored by the control room and procedures are in place to ensure the specification of export gas is maintained. NSMP is fully aware of the composition of commingled pipeline gas upstream of the terminal and therefore would be aware of higher CO₂ concentrations in FUKA pipeline gas well before such gas reaches the terminal (as they are today). If NSMP's pipeline operating model suggested that by processing such gas, the lower specification for Wobbe Index might be breached, NSMP would modify the operating conditions at the terminal (specifically levels of NGL extraction) to ensure that the specification for export gas is met. This can be done relatively quickly and well within the anticipated transit time of any high CO₂ gas present within the pipeline.

To answer the questions relating to CO₂ concentrations in liquids export and maintaining water dew point, NSMP has run a number of HYSYS simulations with gas compositions up to 6 mol% CO₂ and can confirm that at higher concentrations of CO₂ within the pipeline gas, the CO₂ content of the NGL does increase. However in all modes of operation required to maintain the NTS gas specifications, the CO₂ content of the NGL remains less than 0.001 mol% which is well below the specification limits for NSMP's NGL export. In theory, there is some impact on the water dewpoint of export gas through increased CO₂ content however, this is taken care of by the gas dehydration system and in all cases modelled, the sales gas remains well within spec (by a margin of over 40°C).

Impact on other gas quality parameters

The Workgroup requested that analysis be performed on the consequential impacts of increased CO₂ on other gas quality parameters. The St Fergus terminal operator provided correlations of CO₂ content with other NEA Specifications in the gas delivered to the NTS from the FUKA pipeline. The CO₂ content of the processed gas from the FUKA pipeline has been correlated with several GS(M)R parameters measured at the same time (namely, WOBBE, Gross Calorific Value (GCV), Incomplete Combustion Factor (ICF) & Soot Index (SI)). The specification of processed gas from the FUKA pipeline is measured "stand-alone" before commingling with Vesterled gas and is upstream of the NTS compressor station. The data includes certain short-duration periods when blending with Vesterled gas was required due to higher CO₂ concentrations in FUKA pipeline (as per the current blending arrangements).

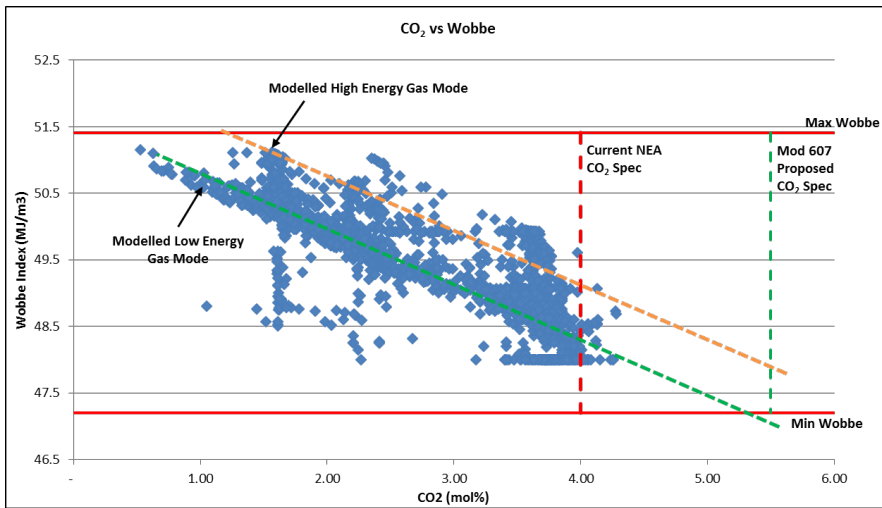

In summary, the historic data analysed reflects variations in pipeline gas composition and also plant operation. An increased CO₂ content of FUKA gas reduces Wobbe and (to some degree) GCV of redelivery gas. Higher CO₂ content gas may need to be managed by adjusting the processing plant operation (warmer plant) to reflect the pipeline gas composition and ensure the export gas meets the lower Wobbe specification.

European Standard on Gas Quality

The European Committee for Standardisation (CEN) published its gas quality standard EN16726 in December 2015. Agreement could not be reached on a harmonised range for Wobbe-Index but was for all other components including CO₂, for which the CEN standard states:

- "At network entry points and cross border points the maximum mole fraction of carbon dioxide shall be no more than 2.5%. However, where the gas can be demonstrated to not flow to installations sensitive to higher levels of carbon dioxide, e.g. underground storage systems, a higher limit of up to 4% may be applied."

The standard's application to Member States is voluntary, although the European Commission had already stated its aspiration to see the standard implemented across Europe. To that end, the Commission requested that ENTSOG conduct an impact analysis and propose an amendment to the EU Interoperability Network Code to make its implementation legally binding.

ENTSOG's project to examine the impacts was conducted during 2016 and this CO₂ wording raised a number of issues for GB at that time. For example, it was not clear how the flexibility between 2.5% and 4% would be applied and managed over time, and, as the GB network contains underground storage facilities, it appeared that all GB entry points would need to conform to a 2.5% limit. Analysis by National Grid NTS showed that this would be expected to have a material negative impact on GB security of supply. This, together with a number of other concerns raised by EU market participants, resulted in the Commission announcing at the Madrid Forum in October 2016 that it did not propose to proceed with making the standard legally binding at this stage but would reconsider gas quality harmonisation again when further CEN work seeking to establish a harmonised Wobbe Index range reaches a conclusion, which is unlikely to be before 2020.

National Grid NTS' Assessment of its Operational Risks

Action 0108: National Grid NTS to consider if an assessment of its operational risks is required - PH and DB to provide a statement for inclusion in the Workgroup Report (if required).

Formatted: Font color: Red, Not Highlight

National Grid NTS wishes to assess the possible NTS operational risks arising from higher CO₂ levels from an NTS integrity perspective. National Grid NTS is to assess the risks in terms of:

- Impact on pipeline corrosion rate of higher CO₂ gas if water was present in NTS pipelines.
- Confirm that the CO₂ levels on the NTS passing a salt cavity storage facility will not have a higher pipeline corrosion rate
- Assess any impact of higher CO₂ levels on compressor start-up
- Assess any impact on compressor running associated with a rapid change in CO₂ (such as might be expected with a trip)

Impact on consumers

The analysis conducted suggests that Direct Connects (DCs) should not receive over 4mol% CO₂ as a result of an unplanned outage at Laggan Tormore but a slug of higher CO₂ (up to 3.87%) could enter the NTS and the duration could be up to 15 hours (worst case scenario).

Deleted: be

Deleted: ing

The Heat Maps provided by National Grid NTS identify the flow routes, and areas which might potentially be affected if penetration reaches further zones.

Deleted: who

The Workgroup has sought Views on the impacts on end consumers. For Modification 0498/502 information was provided by affected parties in relation to:

Formatted: Font color: Red, Not Highlight

Combined Cycle Gas Turbines (CCGTs)

- Linking CCGT Trips to Changes in Gas Quality
- Direct Costs for CCGT Trips/Retuning
- Warranty Impacts
- Downstream Consumers – impact on CO₂ Removal Systems]

Action 0301: Joint Office to contact various consumers/groups for views on the impacts on them from this proposal.

Formatted: Font color: Red

Impact on Storage Operators

Richard Fairholme (Uniper) has offered to provide a view in relation to the Holford Storage site in Cheshire and discuss potential impacts with the Gas Storage Operators Group.

Formatted: Font color: Red, Not Highlight

Action 0302: RF to provide a statement on the Storage impacts for the WGR at the next meeting.

Formatted: Font color: Red

Carbon Cost Assessment

Comment [C6]: Would this section benefit from including any further detail/conclusions from Mod 0498/502 FMR?

At present, gas with high levels of CO₂ concentration flows from offshore fields and under normal circumstances is blended in the FUKA pipeline with gas of lower CO₂ concentration feeding into the pipeline from other fields such that the combined commingled flow of gas exiting the St Fergus terminal and entering the NTS meets the current NTS entry specification for CO₂ at 4 mol%. Therefore, the tonnage of CO₂ associated with gas with high levels of CO₂ concentration already flows into the NTS albeit in a diluted form.

The options for addressing the possible increases in CO₂ levels in export gas during periods when dilution in the FUKA pipeline is unavailable or reduced are to either:

Deleted:

- allow such gas to flow directly into the NTS up to an agreed level (5.5 mol%)₂ or
- to remove the excess CO₂ above the current allowable specification (4.0 mol %) using CO₂ removal technology.

Modification 0498 and 0502¹ considered the following three scenarios, which are relevant to this modification request:

1. Non removal of CO₂
2. Removal Offshore
3. Removal Onshore

The removal technology in this scenario remains the same as that considered in Modification 0498/ 0502 and the significant cost (c. £200m) and long lead time (c. 3 years) associated with the brownfield engineering modifications required for options 2 and 3, all of which remain unchanged from 0498/0502₂, renders these options non-viable for use here on an ad-hoc basis. In addition, the key conclusion of the Teesside carbon cost assessment is that significantly more CO₂ is emitted by removing CO₂ from the gas due to the fact that CO₂ removal using amine units, the optimal technology for CO₂ extraction given the CO₂ concentration, requires process heat which generates additional CO₂. The magnitude of expected CO₂ emissions here is similar to the Teesside modification. When the fact that the CO₂ would already flow to the NTS is taken into account, the conclusion [for this Modification 0607s, based on data](#) from the Teesside report that the least impact in terms of overall CO₂ emissions is to allow the gas with high CO₂ to flow into the NTS₂ is also valid for the proposed St Fergus modification.

Wider Considerations

Maximising Economic Recovery

The Oil and Gas Authority (OGA) have provided the following statement with regards to their involvement to facilitate solutions for blending of high CO₂ gas from the Rhum field in pursuit of Maximising Economic Recovery (MER).

Comment [RH7]: Provide hyperlink to these FMRs?

¹ Final Modification Report 0498: Amendment to Gas Quality NTS Entry Specification at BP Teesside System Entry Point and 0502: Amendment to Gas Quality NTS Entry Specification at the px Teesside System Entry Point

Following on from the Wood report and the establishment of the OGA as a new regulator for the UK upstream Oil and Gas industry there have been a number of legislative changes to establish the role of the new OGA and to clarify the obligations for all upstream industry participants. The Maximising Economic Recovery Strategy for the UK was published in 2015. The central obligation of this strategy is that 'Relevant persons must, in the exercise of their relevant functions, take the steps necessary to secure that the maximum value of economically recoverable petroleum is recovered from the strata beneath relevant UK waters'.

In its pursuit of fulfilling this obligation the OGA has actively intervened with the owners of the Rhum field and the operators of the Bruce field, the FUKA infrastructure and the SIRGE pipeline /Shetland Gas Plant (SGP).

These interventions have included:-

- Facilitating completion of negotiations of an amended Rhum/FUKA Transportation Agreement which allowed ramp up of Rhum production from 1MCM/d to 5MCM/d albeit with additional payments required to secure arrival of sufficient Vesterled pipeline gas at the FUKA terminal as additional assurance against temporary % CO2 excursions exiting the terminal. This additional assurance represents significant UK value leakage.
- Encouraging follow on discussions between the Bruce/Rhum Operator and the FUKA operator to optimise pipeline and terminal operations which have reduced the requirement for guaranteed Vesterled blend gas at FUKA.
- Discussing potential upstream solutions with the owners /operator of SGP around plant trips and the timing of subsequent start ups
- Discussing with the prospective new owner operator of the SAGE terminal around the potential use of SAGE CO2 removal equipment to give further assurance around the % CO2 leaving the St Fergus National Grid plant (such service provision is potentially alleviated by the change in operatorship away from a US company).

In addition the OGA has engaged in discussion with National Grid to promote understanding of the OGA's role and in understanding the capacity for blending and risk reduction across the St Fergus terminals.

The driver for all these interventions is to reduce the economic impact of current blending approaches on the Rhum field and potentially on other high CO2 fields which could lead to premature cessation of production of the Bruce /Rhum offshore Hub (loss of significant UK gas to the downstream system) and/or deter further upstream investments to recover additional gas.

Impacts on Producers

Action 0303: AB to provide some text for the Workgroup Report on the wider impacts on producers.

Formatted: Font color: Red, Not Highlight

Formatted: Font color: Red

Risk of setting precedent

The Workgroup considered whether any decisions taken for Modification 0498 and 0502 set precedent for any other, future, requests at entry points. Participants concluded that there was such a risk, but that each request would be subject to an equivalent assessment under the UNC Modification Rules and then a decision taken by Ofgem based upon the merits of the individual case. On the basis of this individual objective assessment, the proposals were not believed to be discriminatory.

Comment [C8]: From 0498/0502

Conclusions

Comment [C9]: From modifications 0498/502. TBC

No clear conclusions have been achieved. Workgroup participants differed in their view of these changes, depending on the impacts they believed were most relevant to them. This report seeks only to document the arguments to inform further consideration within the UNC modification process (which assesses against the Relevant Objectives). Participants believed that there are other considerations, such as the wider UK interest and UK Government Policy, which are beyond the vires of a UNC modification.

User Pays <i>(Workgroup assessment of Proposer initial view or subsequent information)</i>	
Classification of the modification as User Pays, or not, and the justification for such classification.	No User Pays service would be created or amended by implementation of this modification and it is not, therefore, classified as a User Pays Modification.
Identification of Users of the service, the proposed split of the recovery between Gas Transporters and Users for User Pays costs and the justification for such view.	None
Proposed charge(s) for application of User Pays charges to Shippers.	None
Proposed charge for inclusion in the Agency Charging Statement (ACS) – to be completed upon receipt of a cost estimate from Xoserve.	None

Comment [RH10]: Can this whole table be removed following implementation of FGO

7 Relevant Objectives

Impact of the modification on the Relevant Objectives:	
Relevant Objective	Identified impact
a) Efficient and economic operation of the pipe-line system.	Positive
b) Coordinated, efficient and economic operation of (i) the combined pipe-line system, and/ or (ii) the pipe-line system of one or more other relevant gas transporters.	None
c) Efficient discharge of the licensee's obligations.	None
d) Securing of effective competition: (i) between relevant shippers; (ii) between relevant suppliers; and/or (iii) between DN operators (who have entered into transportation arrangements with other relevant gas transporters) and relevant shippers.	Positive
e) Provision of reasonable economic incentives for relevant suppliers to	None

secure that the domestic customer supply security standards... are satisfied as respects the availability of gas to their domestic customers.	
f) Promotion of efficiency in the implementation and administration of the Code.	None
g) Compliance with the Regulation and any relevant legally binding decisions of the European Commission and/or the Agency for the Co-operation of Energy Regulators.	None

Demonstration of how the Relevant Objectives are furthered inserted here

This modification to change the CO₂ limit at the NSMP Sub Terminal has been preceded by discussion between National Grid NTS and BP, aimed at assessing the feasibility of such change. Some of the following considerations therefore reflect both the results of National Grid NTS analysis and BP's own assessment of changes.

Positive impacts have been identified on the objectives of *a) efficient and economic operation of the pipeline system* and on *d) competition among shippers*.

The combined flows of Bruce and Rhum fields contribute around 5% of UK domestic gas supply into the NTS. These flows help towards a more efficient and economic operation of the pipeline system thanks to an increased utilisation of the existing infrastructure capacity and extending the useful life of existing assets. In addition, extending the production life of the Bruce and Rhum assets allows a wider range of gas into the network and mitigates instances of interruption in production flows, due to seasonal maintenance programs which affect the overall supply of gas to the UK market.

Competition between shippers should be improved through maximization of available production by avoiding early cessation of production, maintaining diversity and reducing reliance on imported gas. In addition, the presence of domestic supplies could contribute to efficient price formation and help sustain NBP as a liquid hub.

Comment [RH11]: What is this?

8 Implementation

As self-governance procedures are proposed, implementation could be sixteen business days after a Modification Panel decision to implement, subject to no Appeal being raised.

9 Legal Text

Text Commentary

As this is an enabling modification, no UNC legal text is required.

Suggested Text

Suggested text to modify the Network Entry Provisions contained within the relevant NEA has been provided by the Proposer.

"2.3 Gas tendered for delivery by System Users to the System at the System Entry Point shall not contain any solid, liquid or gaseous material which would interfere with the integrity or operation of the System or any pipeline connected to such System or any appliance which a consumer might reasonably be expected to have connected to the System. In addition, all gas delivered to the System at the System Entry Point shall be in accordance with the following values: (k) Carbon Dioxide Not More than 5.5mol%."

The Workgroup has considered the legal text and is satisfied that it meets the intent of the Solution.

Formatted: Font color: Red, Not Highlight

Formatted: Font color: Red

10 Recommendations

Workgroup's Recommendation to Panel

The Workgroup asks Panel to agree that:

- This self-governance modification should proceed to consultation.
- This proposal requires further assessment and should be returned to Workgroup.

11 Appendices


1 St Fergus Flow Map

Deleted: s

Appendix 1 - St Fergus Flow Map

Deleted: s

Please find below an example of the operational flows at St Fergus NSMP terminal.

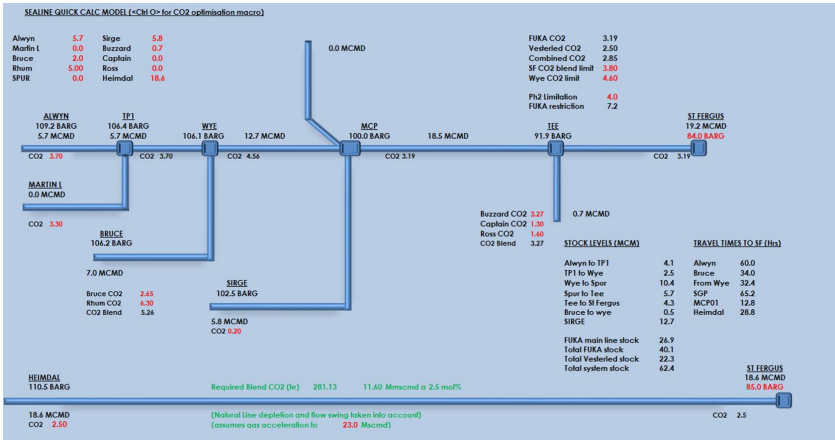

12 Glossary

ADD TABLE HERE (if necessary)